

IJPBS |Volume 4| Issue 2|APR-JUN|2014|193-201

Research Article Pharmaceutical Sciences Biomaterial Sciences

SYNTHESIS AND CHARACTERISATION OF BIOCOMPOSITES AND NANOBIOCOMPOSITES PREPARED FROM *MUSA SAPIENTUM*

P.P. Swain* & S.C. Das

Research work (synthesis part) carried out at Research laboratory, department of chemistry, Salipur college, salipur, Odisha, Pin-754202 *Corresponding Author Email: <u>pp.swain@yahoo.com</u>

ABSTRACT

Banana, a tropical and subtropical plant of genus Musae consists of highly vascular system. The study of chemical composition on banana stem reveals the presence of nearly 62% of cellulosic fibres in it. For this reason it has been used as reinforcing fibres in the formation of composites. The present paper deals with the preparation of biocomposite and nanobiocomposite from banana plant fibre with thermoset prepared from Resorcinol-Paranitroaniline –Urea formaldehyle (R-PNA-U—F) and its nanoform. The presence of various active sites and percentage of carbon, nitrogen and oxygen were provided by FTIR and elemenal analysis respectively. In order to explore the use of biocomposites and nanobiocomposites for different household and industrial applications, their XRD and TGA were done to know their crystallinity and thermal behavior. The Kinetic Study were done using Friedman Technique. XRD Study reveals that the nanobiocomposites are more crystalline than composite itself .The increased adhesion between the nanoresin copolymer and the banana plant waste is responsible for the improved thermal stability of nanobiocomposite over the composite.

KEY WORDS

Crystallinity, Musa sapientum, nanobiocomposite, thermogravimetry and XRD

1. INTRODUCTION

The study and utilization of natural polymers such as in various fields go back to ancient times as man's early scientific activities ^[1-2] various examples can be found in domestic life all around the world regarding effective utilization of various natural fibres.[^{3-5]} However the availability of a large number of synthetic materials and their biochemical properties has changed the market for natural polymers. It is only during last few years that the significance of ecofriendly materials has been realized all over the world to a greater extent ^[6-8] Natural fibres have greater advantages over synthetic fibres due to their affordability biodegradability, ease of processing and ^[9 - 11]mostly due to their eco friendliness as they can be derived from renewable resources ^[12-14]In recent years greater attention has been paid to their use in a number of applications including their use as reinforcing material for polymer matrices with thermosets and thermoplastic matrices^[15].Plant waste fibres have the composition, properties and structure that make them suitable for uses such as composite, textile, pulp and paper manufacture. Natural fibres such as flax, hemp, straw, kenaf, jute and sisal are usually listed raw materials when used as reinforcing phase in composites^{-[16]} (Siqueira et al-2010). Most important constituents of natural fibres are cellulose, hemi cellulose, lignin, wax etc. At the molecular scale, cellulose is a polysachharide composed of glucose molecules linked by glycoside bonds. It contains many hydroxyl groups which can

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

 $_{\rm Page}193$



IJPBS |Volume 4| Issue 2 |APR-JUN|2014|193-201

provide active sites for hydrogen bonding with matrix ^[17] (nanoresin copolymer/resin copolymer).

overcome the limitations of traditional To micrometer-scale composites, there has been push for increasing interest in reinforcing composite materials with nano sized particles as nanocomposites can provide extraordinary properties never found in conventional composites. In view of this the authors have taken a novel attempt to synthesize and characterize biocomposites and nanobiocomposites using cellulose fibres of banana plant stem (containing about 62 % cellulose) ^[18] as reinforcing starting material. The reactivity/chemical composition and use of different sites of banana plant have been investigated by several workers ^{[19-21].} Our country India is the largest producer of banana contributing to 27% of total worlds production^[21] and so large quantities of banana stem (9.8 lakh tones) are left unused on the plantation floor to serve merely as an organic manure. Thus since the availability of banana plant waste is profuse in our country, it is relevant, important and also economically profitable for our country to make it an industrially acceptable reinforcing material which is also one of the objective of present investigation.

2. MATERIALS AND METHODS

2.1 chemicals and materials required:

The chemicals such as paranitroaniline (PNA), urea (NH₂CONH₂), formaldehyde (HCHO), 2N hydrochloric acid (HCl) were procured from Merck and used without purification. The fibres of banana plant waste collected from Musae sapientum (MS), the most common species in India were chopped into small pieces (2-3 inch) and then were washed with deionised water, filtered with ordinary filter paper and then sun dried for seven days. They were grounded to powder form and purified with absolute ethanol.

2.2 preparation of composite:

Two types of biocomposites (A and B) were prepared using fibres of Musae sapientum(MS), one(sampleA) with thermoset copolymer resin T(resorcinol-ureaparanitroaniline – formaldehyde) and another (sampleB) with nano resin copolymer (N1), the nano form of the thermoset T^[22], (presented in our earlier communication) by taking resin to biomas ratio 1:1 proportion by weight in presence of 2N HCl using the linkage of formaldehyde by usual reflux condensation polymerization method at a temperature of 90° C for heating 8 hours^[22]. The samples prepared were washed several times with deionised water and ethanol to remove the impurities (if any) and then dried in vacuum oven at room temperature overnight.

2.3 Testing methods:

Elemental analysis of the samples were done using CHNSO elemental analyser, Thermo Finnigan. The FTIR study of the samples were done using Perkin Elmer model no. RX-1 in the scan range 4000 cm⁻¹ to 500 cm⁻¹ to ascertain the presence of various active sites. About 0.1-0.5 mg of samples were pressed to discs by mixing with potassium bromide under pressure in vacuum to form transparent discs. The the composite and nano thermal stability of composite were studied in nitrogen atmosphere under non isothermal conditions on TGA Q50V20.13 Build39 TA instruments USA at a heating rate of 10°C/min in the temperature range 30°-800°C. The Xray diffraction of the samples were carried out in powder mode using copper target in WXRD/Schimadzu/Japan at temperature 30^oC for structural identification and degree of crystallinity . The voltage setting was at 40 KV and current setting was at 30mA. The XRD patterns were obtained in the scan range 2° to 80° .

3. RESULTS AND DISCUSSION

3.1 elemental analyses: The elemental composition of the Biocomposite and nanobiocomposite are given in the **Table-1**. It is clear from this table that carbon and nitrogen percentage are higher in the nanobiocomposite than in microbiocomposite.

3.2 **FTIR study** : FTIR spectrum of sample A(composite) and sample B (nano composite), represented in **Fig-1 (A)**, **Fig-1(B)** respectively are clear indicative of presence of various active sites like - phenolic -OH , aromatic nucleus, aromatic nitro group and many more (**Table-2**).The absence of absorption band due to N-H stretching as expected spectrum for -NH₂ group, confirms the

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)


P.P. Swain* & S.C. Das


 $_{Page}194$



linkage of - NH_2 group of paranitoaniline with other

monomers.

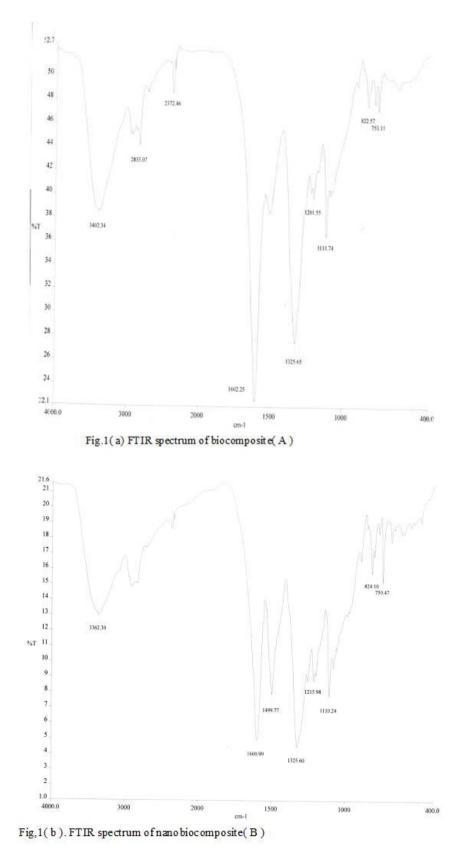



P.P. Swain* & S.C. Das

 $_{\rm Page}195$




www.ijpbs.com (or) www.ijpbsonline.com

3.3 TGA study: Fig (2) represents the thermogravimetric curves of composites in micro scale and nano scale. The percentage of weight loss at different temperature values is represented in **Table-3**. The initial mass loss up to 5-6% is due to loss of moisture entrapped or water of crystallization associated with the composites or other volatile impurities present in them. The onset of initial loss is quicker in microcomposite (A) than nanocomposite (B). The second step decomposition involving breaking or cleavage between the MC fibre and the thermoset is comparatively slower in nanocomposite (

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|193-201

B) than composite(A) The higher decomposition temperature of the nanocomposite confirms its more compactness than the microcomposite. This may be due to strong bonding between hydroxyl group of cellulose and that of the nanoresin coplolymer. For both these samples the degradation of polymeric chain commences after 350°C and is slow. There is marked difference in percentage of weight loss over the entire temperature range for these samples. The nanocomposite is found to be comparatively thermally more stable and compact than the microcomposite.

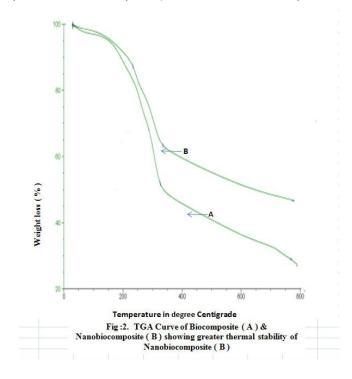

Kinetic study of thermal degradation reaction : The order of reaction and activation energy of thermal degradation reaction for the composite and Nanocomposites were calculated from thermochemical data using Friedman technique^[23] and is represented in **Table(4)**. The order of reaction is as expected, since it is a well known fact that the decomposition of copolymers do not obey first order kinetic perfectly^{.[24]}

3.4 XRD analysis: The XRD graph of sample A (composite) and sample B (nanocomposite) are given in **Fig-3**. As is observed from the XRD graph that both these samples are not perfectly crystalline as superposition of both sharp and diffused scattering

occurs.There exists some non crystalline region in even the mostly highly crystalline structure. The crytstallite dimension of sample A(microcomposite) and sample B (nanocomposite) are calculated using Debye-scherrer equation(1)^[22]

$$Dhkl = \frac{k\lambda}{\beta'\cos\theta} \qquad \dots \qquad (1)$$

Where $\beta^{|}=B-b$, $\beta^{|}=FWHM$ (full width at half maximum) for each peak

B= Line width

b= instrumental broadening

K= Shape factor = 0.9

 θ = Bragg's angle (degree)

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

P.P. Swain* & S.C. Das

Page 196



www.ijpbs.com (or) www.ijpbsonline.com

 λ =wave length of X-ray radiation (Cuk α_1 =1.54056 A[°])

Crystallinity

The percentage of each of these samples that is crystalline can be calculated from equation (2) $^{[22]}$

Where X_c is degree of crystallinity From the calculated data (table-3) it is concluded that the degree of crystallinity as well as crystallite size is comparatively higher in case of sample B (nanobiocomposite) than sample A (microbiocomposite). The crystallite size ranges from 4-37 nm in case microbiocomposite and from 22-54

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|193-201

nm in case of nanobiocomposite. As there is both increase in degree of crystallinity and crystallite size for the respective peaks in nanobiocomposite, the cellulosic fibres of Musae sapientum are expected to be better incorporated into matrices of nanoresin copolymer (thermoset N1) as compared to the copolymer resin (thermoset T)^[25] . The high degree of crystallinity of nanobiocomposite (sample B) explores the solid Behaviour for synthesizing some novel materials. The microcomposite (sample A) tends to be more amorphous in nature. This may be due to poor adhesion between fibres of MS and the thermoset T. The degree of crystallinity and crystallite size enhanced in are case of compared nanobiocomposite as to micro biocomposite.

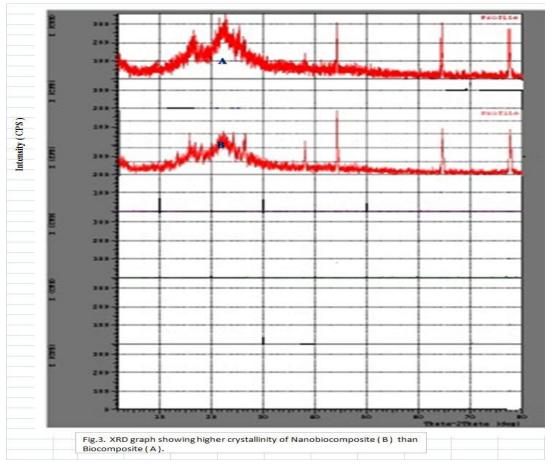


Table -1 Elemental composition (% of carbon, nitrogen & hydrogen)

sample	nitrogen	carbon	hydrogen	
Microcomposite(A)	5.89	43.94	4.666	
Nanocomposite(B)	11.453	57.94	5.844	

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

P.P. Swain* & S.C. Das

 $_{Page}197$

www.ijpbs.com or www.ijpbsonline.com



Peaks(cm ⁻¹)	Probable assignments
3402.34	(m)N-H _{str} secondary amines
2833.04	-CH ₂ - symmetric stretching
1602.25	-C-Hstr. Aromatic ring
1325.65	-N-O, Aromatic nitro compound
1201.55	C-N- stretching / C-H- bending
1111.74	C-O bending
822.57	-C-H /monosubstituted C=C
751.11	Monosubstituted aromatic ring out of plane

Table2(a): FTIR data of microcomposite (A)

Table 2(b): FTIR data of nano composite (B)

Peaks(cm ⁻¹)	Probable assignments
3362.30	O-H-peak (Free)
1600.99	C-Hstr. Aromatic ring
1499.77	N-H in plane deformation(secondary amine)
1325.60	N-O, Aromatic nitro compound
1215.98	C-N- stretching / C-H- bending
1110.24	C-O bending
824.10	C-H /monosubstituted C=C
750.47	Monosubstituted aromatic ring / metadisubstituted benzene

Table 3: Weight loss (%)	pattern (concise data) of the microcomposite and nanocomposite at different
temperature range	

Sample	Nature	100⁰C	200 ⁰ C	300⁰C	400 ^⁰ C	500⁰C	600⁰C
А	Microcomposite	3.02	11.271	36.96	54.2	59.09	63.58
В	nanocomposite	1.76	8.36	29.75	49.23	54.81	59.64

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

P.P. Swain* & S.C. Das

 $_{\rm Page}198$



www.ijpbs.com (or) www.ijpbsonline.com

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|193-201

Sample	Nature	Temperature range	Order of reaction	Activation energy(KJ/mole)
А	Microcomposite	0^{0} -600 0 C	1.092	0.283
В	nanocomposite	0^{0} -600 0 C	0.942	0.111

Sample	Nature	2θ in degree	B (FWHM) in	Degree of	Crystallite size
			degree	crystallinity	(D) in nm
				(X _c)	
А	Microcomposite	15.157	0.36	0.296	22.361
	(resin copolymer T				
	+ fibres of MS)	16.46	0.95	0.016	8.479
		24.05	0.369	0.0439	11.89
		25.31	0.95	0.083	14.886
		26.31	0.40	1.298	37.216
		44.22	0.72	0.104	16.874
		64.57	0.84	0.092	17.792
		77.68	1.8	0.083	18.607
В	Nanoocomposite	15.86	0.173	2.669	46.508
	(nanoresincopolymer				
	N1+fibres of MS)				
		17.99	0.36	0.296	22.412
		24.09	0.22	1.129	37.04
		26.511	0.15	4.096	54.58
		38.00	0.188	2.080	44.44
		44.25	0.17	2.813	50.60
		64.58	0.183	2.255	51.51
		77.68	0.205	1.604	49.924

Table-5 XRD peak fit parameters of the microcomposite and nanocomposite

4. CONCLUSION

- 1. The present investigation is an extensive study between micro and nanocomposite prepared from banana plant fibres, copolymer resin and nano resin copolymer. The XRD and TG investigation concludes the more applicability of and crystallinity solid behavior of nanocomposites in comparison to microcomposites. The nanobiocomposite due to crystallinity can be its high percentage of modified to some novel biomaterials which will have wide household and industrial applications.
- 2. Regarding thermal behaviour, nano biocomposites are more resistible to thermal degradation than micro biocomposites so that

nano biocomposites may be used as heat resisting materials.

- It is an attempt to explore the possibilities of reusing waste banana fibres to useful household and industrial materials.
- Phenolic resin polymers are replaced partially by a bio renewable molecules (Musa Sapientum) thereby getting a cost effective resin.

5. ACKNOWLEDGEMENTS

Authors would like to acknowledge Laboratoty of Advanced Research in polymeric materials (LARPM), SAIF, IIT,Mumbai and NISER,Bhubaneswar for synthesis and various analytical test of the sample.

REFERENCES

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

P.P. Swain* & S.C. Das

 $_{Page}199$



www.ijpbs.com (or) www.ijpbsonline.com

- [1]. Singha AS,Thakur VK, Fabrication of Hibiscus Sabdariffa fibre reinforced polymer composites, Iran Polym j,17,541-554,2008.
- [2] Beydokhti KK, Behravesh AH, Taher A, an experimental study on mechanical and microstructural properties of microcellular foams of ABS composites, Iran Polym j, 15, 555-567,2006.
- [3] Hashemi SA, Hassan A, Ahmadi S, Sahraeian R, Khatibi MA, The influence of dimethyl hydrogen Siloxane on polypropylene-straw fibres interface, Iran Polym j,15,629-635,2006.
- [4] Singha AS, Shama A, Thakur VK, Pressure induced graft co-polymerization of acrylonitrile onto Saccharum cilliare fiberand evaluation of some properties of grafted fibres, Bull Mater Sci, 31, 7-13, 2008.
- [5] Singha AS, Thakur VK, Mechanical properties of natural fiber reinforced polymer composites, Bull Mater Sci,31,991-999,2008.
- [6] Hosseini SH, Simiari j, Farhadpour B, Chemical and electrochemical grafting of polyaniline on to chitosan, Iran Polym j, 18,3-13,2009.
- [7] Hayaty M, Beheshty MH, Shrinkage, cure characterization and processing of unsaturated polyesteresin containing PVAc low-profile additive, Iran Polym j,13,389-396,2004.
- [8] Hashemi SA, Hassan A Ahmadi S, Sahraeian R, Khatibi MA, The influence of dimethyl hydrogen siloxane on polypropy lene-straw fibres interface, Iran Polym j,15,629-635,2006.
- [9] Ismail H, Mohamad Z Bakar AA, The effect of dynamic vulcanization on properties of rice husk powder filled polystyrene/styrene butadiene rubber blends, Iran Polym j,13,11-19,2004.
- [10] Ismail H Rabu EM, Wirjosentono B, Dynamic properties and swelling behavior of bamboo filled natural rubber composites: the effect of bonding agent, Iran Polym j,10,377-383,2001.
- [11] Singha AS, Thakur VK, Synthesis and chacterisation of Grewia Optiva fiber reinforced PF matrix based polymer composites, Int j Polymater, 57, 1059-1074, 2008.
- [12] Singha AS, Thakur VK, Morphological, thermal and physicochemical characterization of surface modified pinus fibers, Int j Polym Anal Charact, 14, 271-289, 2009
- [13] Singha AS, Thakur VK,*Effect of fiberloading on ureaformaldehyde matrix based green composites,* Iran Polym j,*17*,861-873,2008.

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|193-201


- [14] Anande AV, Thambidurai S, Modification of bioscoured cotton cellulose by grafting and hydrolysis process, Iran Polym j, 18,393-400, 2009.
- [15]. Vijay Kumar Thakur and Amar Singh Sngha, Physicochemical and Mechanical Characterization of Natural Fibre Reinforced Polymer Composites, , Iran Polym j,19,(1), 2010,3-16
- [16] Luffa as a cellulose source, Bioresources 59(2), 727-740
- [17]. C. Parida,S.K. Dash, S.C. Das, Effect of fibre treatment on mechanical properties of luffacylindrica-resorcinolcomposites, international journal of fibre and textile research, universal research publications 2013; 3(1),13 - 17
- [18] M.Z.H. Khan, M.A.R. Surkar, Md. Forhad, Ibne Al Iman, Raimo O. Malinen, *Fibre morphology and pulping study of banana pseudostem*, international journal of fibre and textile research, universal research publications 2013; 3(1),31-35
- [19] chertman, M. & simoes-Morreira, J. R. 2008. Secagem de Papel Produzido a Partir do pseudocaule de Bananeira. BT 0811. http//www.mechanicapoliusp.org.br
- [20] D.G. Feriotti & A.M Iguti, proposal for use of pseudostem from banana tree (usa cavendish), Maua institute of technology, Sao sul, Caetano do, Brazil.
- [21] Debabandya Mohapatra, Sabyasachi Mishra and Namita sutar, *Banana and its product utilization, an overview*, journal of scientific and industrial research *vol-29,May-2010, pp-323-329.*
- [22] P.P Swain. S.C. Das, synthesis and characterization of nanoresin copolymer prepared from paranitro aniline, resorcinol and urea, International journal of research in pharmaceutical and biological sciences, Vol. 4(2) Apr-Jun 2013
- [23] Pawan P. Kalbende, Mangesh v. Tarase, and Anil .B. Zade, preparation, characterization and thermal studies of p-nitrophenol- based copolymer, journal of chemistry, volume 2013 (2013) article ID 846327 9
- [24] Sanjiokumar S. Rahangdale and Wasudeo B. Gurnule. Antimicrobial activity and thermal properties of copolymer resin derived from 2, 2'dihydroxybiphenayl, dithaiooxamide and formaldehyde, Scholars Research Library, Der Pharma Chemical, 2011, 3 (4) : 314-322.
- [25] LiY, Mai, Y, W, Ye.L., Composite science and technology, 60, 2037-2055(2000)

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

P.P. Swain* & S.C. Das

www.ijpbs.com or www.ijpbsonline.com



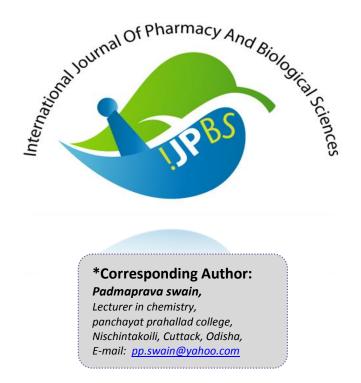

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)