

IJPBS |Volume 4| Issue 2|APR-JUN|2014|234-243



REMOVAL OF CHROMIUM (VI) IN AQUEOUS SOLUTION AND INDUSTRIAL WASTEWATER USING DRY PODS OF *PROSOPIS SPICIGERA*

C. N.Deepa and S.Suresha*

Department of Environmental Science, Yuvaraja's College, University of Mysore, Mysore-05, Karnataka, India *Corresponding Author Email: <u>sureshakumar12@yahoo.com</u>

ABSTRACT

The study involves the batch biosorption process for the removal of Chromium in the aqueous solution using the dried pods of Prosopis spicigera. Factors influencing the biosorption are pH, contact time, adsorbent dose and initial metal ion concentration. Characterization of the biosorbent is carried out to study the morphology by using Scanning Electron Micrograph (SEM). The maximum biosorption occurred at pH 3, contact time 120 min, Biosorbent dose 2 g/l and initial metal ion concentration of 200 mg L⁻¹. Kinetic models were also described and fit good in Pseudo second order. The equilibrium data was also analyzed using Langmuir and Freundlich isotherms.

KEY WORDS

Chromium, Prosopis spicigera, SEM, Kinetic models, Langmuir and Freundlich isotherms.

INTRODUCTION

Increasing awareness of water pollution during recent years and its far reaching effects has prompted concerted efforts towards pollution abatement. Among the different heavy metals, chromium is a common and very toxic pollutant introduced into natural waters from a variety of industrial wastewaters [1]. Hexavalent Chromium is released into the environment by large number of processes such as electroplating, leather tanning, wood preservation, pulp processing, steel manufacturing etc. and it is also highly soluble in water and carcinogenic to humans. According to the ISI: a Bureau of Indian standard (BIS), industrial effluent permissible discharge level of Chromium is 3.0 mg L⁻¹ [2, 3]. In aqueous solutions, chromium frequently occurs as Cr (VI) or Cr (III) [4]. Hexavalent chromium which is primarily present in the form of chromate CrO_4 and dichromate Cr_2O_7 , has significantly higher levels of toxicity than the other valence states [5].

Generally chromium is removed from wastewater by different methods such as chemical precipitation, electrochemical reduction, sulfide precipitation, ionexchange, Reverse Osmosis, solvent extraction etc [6] and these methods are not cost effective, unaffordable for large scale to remove chromium from the wastewater.

An attractive process has emerged for removing noxious substances from wastewater is Biosorption which has major advantages over conventional treatment methods include low cost, high efficiency of metal removal from dilute solutions, minimization of chemical biological sludge, no additional nutrient requirement and regeneration of biosorbent and possibility of metal recovery [7].

In the present study the dried pods of *Prosopis spicigera* is used for the removal of Chromium in the aqueous solution. The pod is straight, edible, smooth, 10 to 15 cm long, 0.6 cm thick which grows in dry and arid region. Different parameters have been studied such as pH, contact time, adsorbent dose, initial metal ion concentration and size variation for the biosorption of chromium. The biosorption kinetics and equilibrium isotherms are also been investigated.

MATERIALS AND METHODS

Preparation of biosorbent: The pods of *Prosopis spicigera* belongs to Family *Fabaceae* was collected

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa & S.Suresha*



from Mysore district, Karnataka, India. The collected biosorbent was washed thoroughly with the distilled water several times to remove the impurities. Then the washed pods were sun dried for several days, grinded into different sizes from 100 μ m to 400 μ m and sieved. The fine powder of size 100 μ m was selected and used as a biosorbent, kept in an air tight plastic jar until it is used for further experiments.

Preparation of Metal ion solution:

Stock solution of 1000 mg/L⁻¹ of chromium was prepared by dissolving 2.828 g Potassium dichromate A.R. grade in 1000ml of double distilled water and it was further diluted to required concentration. The pH of the solution is adjusted by using 0.01N HCl and 0.01N NaOH and the resultant final concentrations were analyzed by AAS.

Metal plating Wastewater:

The wastewater was collected from electroplating industry located in Mysore, Karnataka, India. The physico chemical characteristics were analyzed using standard methods and are presented in **Table 1**.

Characterization of Biosorbent:

The scanning electron micrograph was used to reveal the surface texture and morphology of the biosorbent by using ZEISS, EVO/LS 15-15-41, smart SEM version 5.05.

Biosorption Experiments:

Biosorption experiments have been carried for the removal of Chromium using pods of *Prosopis spicigera*. In the biosorption studies 20 ml of 1000 mg/L⁻¹ of Cr (VI) solution was taken in the Erlenmeyer flask and the solution was adjusted to desired pH using 0.01N HCl and 0.01N NaOH. The resulted solution was stirred for 20 min at rate of 180 rpm by mechanical shaker and was separated by centrifugation at a rate of 6000 rpm for 30 min. The supernatant solution was analyzed by AAS.

The influence of pH on biosorption was carried by taking 20 ml of 1000 mg/L⁻¹ of chromium solution in pre cleaned conical flask containing 2 g of 100 μ m size *P. spicigera* and the pH was adjusted in the range of pH 2 to 6 by using 0.01N HCl and 0.01N NaOH.

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|234-243

In order to study the effect of size of adsorbent on biosorption, 20 ml of 1000 mg L^{-1} of Cr (VI) with particle size of adsorbent varying from 100-400 μ m at pH 3. The mixture was shaken for 60 min in a mechanical shaker at a speed of 180 rpm, and then the resulting mixture was filtered.

In order to find out the effect of contact time of chromium biosorption by taking 20 ml of 1000 mg/L⁻¹ of Cr (VI) in a Erlenmeyer flask containing 2 g 100 μ m size biosorbent. The mixture was shaken at time intervals varying from 20 to 200 min in a mechanical shaker at a speed of 180 rpm.

The effect of biosorbent dosage was investigated by taking 20 ml of 1000 mg/L⁻¹ fixed Cr (VI) concentration in a different 250 ml Erlenmeyer flask containing dosage from 0.2 to 3.0 g at a predetermined pH 6 with time intervals of 60 min. The effect of initial metal ion concentration from 25 to 250 mg/L⁻¹ was studied by using predetermined optional pH, dosage, and size and equilibrium time at a room temperature. The percent removal of chromium was calculated for each run using the following formula.

 $R = (C_0 - C_f) \times 100 / C_0$ (1)

Where, C_0 and C_f are the initial and residual concentration of chromium respectively in solution in mg/L. The metal uptake capacity for initial and final concentration of chromium was calculated using the following formula:

$$q_e (mg/g) = V (C_i - C_e) / M$$
 (2)

Where, q_e is the chromium uptake (mg/g), Ci and Ce are the initial and final chromium concentration respectively in the solution (mg/l). V is the solution volume (L) and m is the mass of adsorbent (g).

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



www.ijpbs.com (or) www.ijpbsonline.com

Table I: Physico chemical parameters of Industrial effluent

Parameters	Contents (mg/L)
рН	6.50
Conductivity(µs/cm)	1765
Total dissolved solids	1020
Calcium	103.13
Magnesium	44.89
Chloride	205.12
Sulphate	78.34
Sodium	65.3
Potassium	3.7
Nickel (II)	14.20
Chromium (VI)	45.82

Table II: Pseudo first- order and Pseudo second –Order constants for chromium biosorption by P. spicigera

Metal	etal Pseudo first order			Pseudo second order			
chromium	q _e (mg g ⁻¹)	K ₁ (min ⁻¹)	R ²	q _e mg g ⁻¹	K₂(g mg⁻¹min)	R ²	h
	1.561	0.037	0.903	1.995	0.159	0.983	0.636

Table III: Langmuir and Freundlich isotherms for chromium biosorption by P. spicigera

Metal	Langmuir			Freundlich		
Pb (II)	q _{max}	b	R^2	K _f	1/n	R^2
	18.9	0.528	0.756	19.05	0.972	0.973

Table IV: Comparison of biosorption capacity chromium (VI) with various adsorbents

	Biosorption		
Biosorbents	capacity (mg/g)	References	
Treated saw dust of	9.5	[24]	
Sal tree			
Sugarcane bagasse	13.4	[25]	
Hazelnut shell	17.7	[26]	
Gulmohar's fruit shell	12.28	[27]	
Psidium guajava	4.7	[28]	
(leaves powder)			
Immobilized biomass	5.3	[29]	
Bagasse fly ash—a	5.0	[30]	
sugar industry waste			
material			
Clodophara crispata	6.20	[31]	
Pilayella littoralis	6.55	[32]	
Prosopis spicigera	18.9	Present study	

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



www.ijpbs.com (or) www.ijpbsonline.com

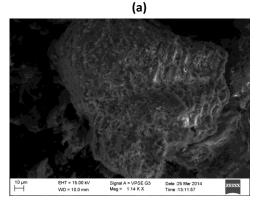





Fig 1(a) SEM image of raw P. spicigera







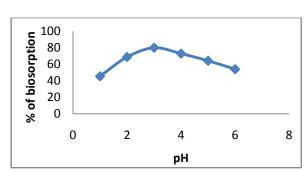


Fig. 2 Effect of pH on biosorption of chromium by P. spicigera

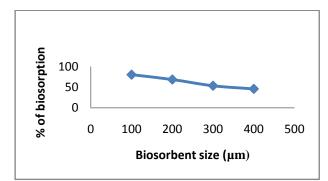


Fig. 3 Effect of Biosorbent size on biosorption of chromium by P. spicigera

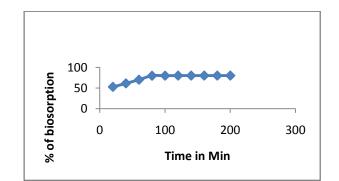


Fig.4 Effect of contact time on biosorption of chromium by P. spicigera

 ${}^{\rm Page}237$

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



www.ijpbs.com (or) www.ijpbsonline.com

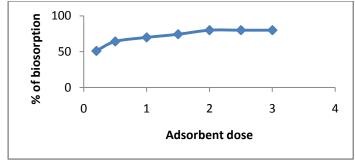


Fig.5 Effect of Biosorption dose on biosorption of chromium by P. spicigera

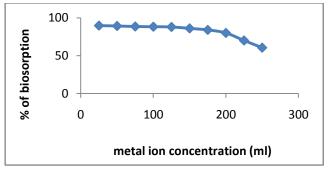


Fig.6 Effect of Metal ion concentration on biosorption of chromium by P. spicigera

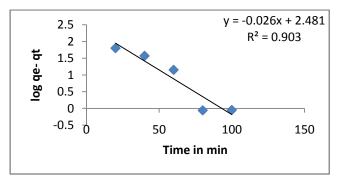


Fig.7. Pseudo first - order sorption Kinetics for chromium by P. spicigera

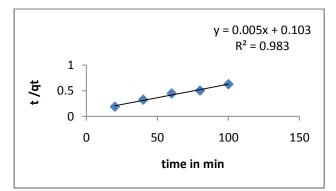


Fig.8 Pseudo second- order sorption Kinetics for chromium by P. spicigera

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



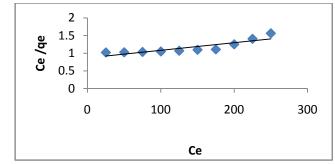


Fig.9. The linearized Langmuir adsorption isotherms of chromium P. spicigera

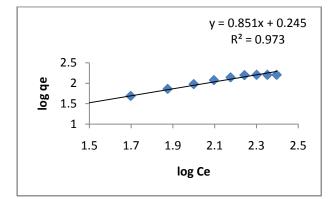


Fig.10. The linearized Freundlich adsorption isotherms of chromium P. spicigera

RESULTS AND DISCUSSION

Characterization of Biosorbent:

SEM images of native and chromium loaded biosorbents are shown in **Fig 1(a) and 1 (b)** at 1.14 X and 700 X magnifications. It has been observed that the uneven texture with a lot of irregular format in the native biosorbent. During the period of biosorption the morphology has undergone different changes as there is the opening of pores which results in large surface area and small dots like structure shows that the accumulation of metal on surface of the biosorbent.

Effect of Initial pH

Fig 2 shows the effect of pH on the percentage removal by *P. spicigera*. The pH of the solution influence both metal binding on the cell surface and the chemistry of metal in solution [8]. The maximum biosorption was recorded at pH 3 with percentage removal of 79.98%. The dominant form of chromium (VI) at pH 3 is HCrO₄ whereas increase in the pH will shift the concentration of HCrO₄ to other forms like, $CrO_4^{2^2}$ and Cr_2O_7 . At lower pH Cr (VI) will be reduced to Cr (III) under acidic conditions. The resulting Cr (III)

cations will not adsorb on the protonated surface of the biomass due to the repulsive force, it may cause decrease in the adsorption [26]. Beyond pH 6 the experiment was not conducted as precipitation may occur which interfere the biosorption process [9, 10]. Similar results coincide which is reported by using non-living biomass of *Nostoc species*, Treated saw dust of *Indian Rose wood and Coconut tree* saw dust [11, 13]

Effect of Particle size

In order to understand how particle size affects the adsorption, a series of experiments were conducted using *P. spicigera*. The average particle size was changed from 100 to 400 μ m keeping the other variables constant. The experiment has revealed that the saturation capacity of metal ions adsorption of *P. spicigera* decreased by increasing the particle size (**Fig. 3**). This can be attributed to the relationship between the effective specific area of the adsorbent particles and their sizes. At 100 μ m size the maximum adsorption was 79.98% and when the particle size increased from 100 to 400 μ m the rate of adsorption decreases from 79.98% % to 45.7 %. This implies that

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



smaller particles have large surface area and hence the percentage of adsorption is more [14]

Effect of contact time

Fig 4 shows the effect of contact time on removal of Cr (VI) by *P. spicigera* with varied time from 20- 200 min in a separate runs with constant pH 3. The result shows that the maximum percentage removal (79.98%) was attained at 120 min and further the rate of biosorption was static. At the initial stage the process of biosorption was high and became slower when it is approaching the equilibrium stage. This may be due to more number of vacant negatively charged sites available initially on the surface of the biosorbent and the sites are gradually filled up while approaching equilibrium [15]. Similar results were reported by using non living biomass of *Nostoc species* and *Tamarindus indica* pod shells [11, 12].

Effect of Biosorbent dose

Biosorbent dose is an important parameter for the removal of Cr (VI) was studied with varying biosorbent dosages from 0.2 - 3.0 g while keeping the metal ion concentration constant. Fig 5 shows the percent removal of metal ion increases rapidly with increasing the weight of the biomass. The maximum percent removal was attained at 2 g/L^{-1} and the biosorption capacity of chromium on P. spicigera was 79.98% at fixed pH 3, contact time 120 min. It has been noted from the experiment that, as the biosorbent dose is increased the biosorption capacity also increase. The reason for this is, increase in surface area which in turn increases the binding sites for chromium [16]. The metal ion normally adsorbs one molecule thick layer over the surface. When this monolayer covers the surface the capacity of the adsorbent exhausted and causes the attainment of equilibrium [28]. The SEM reveals and shows the adsorption. As the metal ions are insufficient to cover all the binding sites of biosorbent the metal uptake is decreased. Similar trend of results were reported by using macro algae Cladophora species and immobilized fungal biomass [17, 18].

Effect of Metal ion concentration

The effect of metal ion concentration of Cr (VI) in the aqueous solution on the percentage removal is shown in the **Fig 6**. The removal of Cr (VI) decreased from 98% to 79.98% with increase in the concentration from 25 mg/L⁻¹ to 250 mg//L⁻¹ at a constant pH 3 with

2 g/L biosorbent at 120 min. Such behavior can be attributed to the increase in the amount of biosorbate to the unchanging number of available sites on biosorbent. The results show that, with increasing metal ion concentration, the specific sites are saturated and vacant sites are filled and at low concentrations adsorption sites took up the available metal more rapidly or quickly while at higher concentrations metal ions need to diffuse to the biomass surface by intra particle diffusion and greatly hydrolyzed ions will diffuse at a slower rate [15, 19, 20].

Kinetics of Biosorption

To investigate the biosorption mechanism and the its potential rate pseudo first order and pseudo second order kinetic models are used to check the equilibrium data and it was described traditionally by [21]. The pseudo first order equation is represented by following formula:

 $\log q_{e} - q_{t} = \log q_{e} - K_{1} t / 2.303$ (3)

Where, qe is the amount of metal adsorbed (mg/g), qt is the amount of metal adsorbed at time t (mg/g), K_1 is the rate constant of pseudo first order adsorption (min⁻¹). Values of adsorption rate constant (K_1) for the metal adsorption onto *P. spicigera* were determined from the straight line plot of log (qe – qt) against t (**Fig 7**). The pseudo first order equation parameters with correlation coefficient are represented in **Table II**

Pseudo second order model:

Pseudo second order equation is expressed as follows:

$$d_{a}t/dt = K_{2} (qe-qt)^{2}$$
(4)

Where, qt and qe are the amount of metal adsorbed at time t and at equilibrium $(mg.g^{-1})$ and K_2 $(g.mg^{-1}$ min⁻¹) is the pseudo second order rate constant for adsorption process. The integrated form of equation (4) can be expressed as

$$t/q = 1/K_2q^2 + 1/qet$$
 (5)

The initial sorption rate, h (mg/g. min), at t = 0 is defined as

$$h = K_2 q e^2$$
 (6)

Where, K_2 and h values were determined from the slope and intercept of the plots t/q against t (**Fig 8**).

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



www.ijpbs.com (or) www.ijpbsonline.com

Adsorption isotherms

In order to describe the adsorption mechanism of low-cost adsorbents used for water and waste water treatment experimental equilibrium data are most frequently modeled by the relationship developed by Langmuir isotherm [22] which is expressed as follows $C_e/q_e = 1/q_0b + C_e/q$ (7) Where, C_e and q_e are the residual and metal uptake capacity mg/L⁻¹ respectively, b is the adsorption equilibrium constant (mg/L⁻¹) related to adsorption and q_0 is the maximum monolayer capacity of the adsorbent (mg/g). A plot between *Ce* /qe and *Ce* is shown in (**Fig. 9**) and the values of q_{max} and b are 18.9 and 0.52 respectively as shown in (**Table III**).

And the linearized form of Freundlich isotherm [23] can be represented as

$$\log (q) = \log (Kf) + 1/n \log (Ce)$$
 (8)

Where, q is the amount of metal adsorbed per unit weight of the adsorbent at equilibrium (mg^{-1}) , Ce is the Equilibrium of metal concentration $(mg L^{-1})$, K_f is the measurement of adsorption capacity $(mg g^{-1})$ based on Freundlich isotherm, n is the adsorption equilibrium constant. The results are shown in **Table III and Fig 10**.

Application to electroplating wastewater

In order to assess the performance of *P. spicigera* for the removal of Cr (VI) biosorption, experiment was conducted using Erlenmeyer flasks containing 100 ml of electroplating wastewater sample. To the wastewater sample 2 g/L⁻¹ of biosorbent was added adjusted to pH 3 at which the maximum biosorption was achieved, with agitation time 120 min in mechanical shaker at a speed of 180 rpm and the resultant solution was analyzed by AAS. The result showed that the biosorption of Cr (VI) from the electroplating wastewater was 65% which was less compare to the aqueous solution. The biosorption efficiency indicates that there is less competition of other ions present in the wastewater for binding sites on *P. spicigera*.

ACKNOWLEDGEMENT

The authors would like to acknowledge University Grants Commission, New Delhi, for financial support under Rajiv Gandhi National Fellowship. Authors would also show their gratitude to Dr. Chandrashekar

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|234-243

and Mr. Yogesh, IOE, University of Mysore, Mysore for helping us in SEM analysis.

CONCLUSION

The pod of *P. spicigera* can be used as low cost biosorbent for the removal of chromium due to its adsorption capacity (q_{max}) of 18.9 mg/g in the aqueous solution and also in electroplating wastewater. Maximum biosorption took place at pH 3, contact time 120 min. Pseudo second order fits well in the kinetic model than the pseudo first order model of R² value 0.983. The adsorption isotherm was described by Langmuir and Freundlich model. However, Freundlich isotherm shows good agreement with equilibrium data.

REFERENCES

- Srivastava A, Singh S, Prakash R and Srivastava SK. Impact of tanneries on ground water quality in kanchandpur area, Kanpur dehat district, U.P., Journal Ins.Pub.Health Engineers 2: 19-26, (2013).
- Kadirvelu K, Thamaraiselvi K, and Namasivayam C. Adsorption of Nickel (II) from Aqueous Solution onto Activated Carbon prepared from Coir Pith. *Sep. Purif. Technol.*, 24,477- 505,(2001).
- Kadirvelu K, Senthilkumar P, Thamaraiselvi K, and Subburam V., Activated Carbon Prepared from Biomass as adsorbent: elimination of Ni (II) from aqueous solution. *Bioresour Technol.*, 81, 87-90(2002).
- Dakiky M, Khami A, Manassra A, and Mereb M. Selective adsorption of chromium (VI) in Industrial wastewater using low cost abundantly available adsorbents. Advances in Environmental Research. 6(4), 533-540, (2002).
- Sharma DC. and Forster CF. Column studies into the adsorption of chromium (VI) Using Sphagnum moss Peat. *Bioresource Technology.*, 52 (3): 261-267,(1995).
- Namasivayam C and Yamuna RT. Adsorption of Chromium (VI) by a Low- cost Adsorbent: Biogas Residual Slurry. *Chemosphere.*, 30 (3): 561-578,(1995).
- Kratochil D and Volesky B. Biosorption of Cu from ferruginous wastewater by algal biomass. Water Research. 32: 2760-2768, (1998).
- Dursun AY. A comparative study on determination of equilibrium, kinetic and thermodynamic Parameters of biosorption of copper (II) and lead (II) ions onto pretreated *Aspergillus niger*. *Biochem. Eng. J.*, 28, 187 – 195, (2006).

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*



www.ijpbs.com (or) www.ijpbsonline.com

- Parvathi K, Nagendran R and Nareshkumar R. Lead biosorption onto Waste Beer Yeast By- product: Means to Decontaminate Effluent Generated from Battery Manufacturing Industry. *Environ Biotechnol*, 10: 92- 105, (2007).
- Mahamadi C and Torto N. A Comparitive study of the Kinetics of Nickel Biosorption by River Green Alga Obtained from different Environments: Mine Effluent Drainage Stream and Natural River System. *Electronic Journal of Environmental, Agricultural and Food Chemistry.*, 6: 2165-2172, (2007).
- Pandav Parag Vishwanath., Javalkote Vivek Shiwshankar and Patil Liladhar Shivram. Removal of Hexavalent chromium Cr (VI) by indigenously isolated Non-living biomass of *Nostoc* sp. *J. Algal Biomass Utln.*, 5 (1), 88–96, (2014).
- Ahalya N, Kanamadi RD and Ramachandra TV. Biosorption of Chromium (VI) *Tamarindus indica* pod shells, *International Journal of Environmental Science Research.*, 1 (2): 77-81, (2008).
- 13. Karthikeyan T, Rajgopal S, Miranda LR. Cr (VI) adsorption from aqueous solution by Hevea Brasilinesis sawdust activated carbon, *J. Hazard. Mater.* 2005.
- Deepa CN, AA. Syed and Suresha S. Kinetic and Isothermal Studies on the removal of Copper (II) from aqueous solution by *Araucaria cookii*: Response Surface Methodology for the Optimization of Parameters. *International Journal of Recent Scientific Research*. 5(4): 820-827, (2014).
- Saradhi BV, Rao SRK, Kumar YP, Vijetha P, Rao KV and Kalyami G. Applicability of Langmuir and Freundlich theory for biosorption of chromium from aqueous solution using Test of Sea Urchins. *International Journal of Chemical Engineering Research.* 2 (2): 139 – 148, (2010).
- Esposito A, Pagnenelli F, Lodi A, Solicio C.and Veligo F. Biosorption of heavy Metals by *Sphaerotiluc natans:* an equilibrium study at different pH and biomass concentrations. *J. Hydrometallurgy.*, 60, 129-141, (2001).
- Khataee AR, Dehghan G. Optimization of biological treatment of a dye solution by macroalgae *Cladophora sp.* using response surface methodology. *J. Taiwan Inst. Chem. Eng.*, 42, 26–33, (2011).
- Sudha Bai R, Abraham TE. Studies on chromium (VI) adsorption–desorption using Immobilized fungal Biomass. *Bioresour. Technol.*, 87, 17–26,(2003).
- Jnr, MH and Spiff, Al.Studies on the effect of pH on the sorption of Pb²⁺ and Cd²⁺ from aqueous solutions by Caladium biocolor (Wild Cocoyam) biomass . *Eur. J. Biotechnology.*, 7, 313–323, (2004).

IJPBS |Volume 4| Issue 2 |APR-JUN|2014|234-243

- Bhatti, NH, Hanif, MA, Nadeema, R, Ahmada, NR, and Ansari, TM. Ni (II) biosorption by *Cassia Fistula* (Golden shower) biomass. *J. Hazard Mater.* 139, 345-355, (2006).
- Lagergren S., "About the theory of so called adsorption of soluble substances. K.Sven Vetenskapsakad Handle. 24, 1, (1898).
- 22. Langmuir I., The Adsorption of gases on Plane Surfaces of Glass, Mica and Platinum, J. Am. Chem. Soc, 40, 1361-1403, (1918).
- 23. Freundlich H., Uber die Adsorption in Lusungen. J.Am. Chem Soc; 61, 2, (1939).
- Saroj S. Baral, Surendra N. Dasa, Pradip Rath. Hexavalent chromium removal from aqueous solution by adsorption on treated sawdust. *Biochemical Engineering Journal.* (2006).
- Sharma DC and Forster CF., A preliminary examination into the adsorption of hexavalent chromium using Low-cost adsorbents, *Bioresource. Tehnol.*, 47, 257-264, (1994b).
- Cimino G, Passerini A and Toscano G. Removal of toxic cations and Cr (VI) from aqueous solution by Hazelnut shell. *Water research.* 34, 2955-2962, (2000).
- Attimodde Girirajanna Devi Prasad and Mohammed Abdulsalam Abdullah., Biosorption of Cr (VI) from synthetic wastewater using the fruit shell of Gulmohar (Delonix regia): application of electroplating wastewater. *Bioresource.*, 5 (2): 838- 853, (2010).
- Ch. DurgaPrasad, Satya Phani Krishna P and Ch. Srinivas. Equilibrium studies on biosorption of chromium on Psidium guajava leaves powder. Journal of Chemical and Pharmaceutical Research. 4 (4): 1868-1879, (2012).
- 29. Narsi R Bishnoi, Rajendra Kumar and Kiran Bishnoi. Biosorption of Cr (VI) with *Trichoderma viride* Immobilized fungal biomass and cell free Ca- alginate beads. Indian Journal *of Experimental Biology.* 45, 657-664, (2007).
- Vinod K. Gupta, Dinesh Mohan, Saurabh Sharma and Kuk T. Pa. Removal of chromium (VI) from Electroplating industry wastewater using bagasse fly ash—sugar industries waste material. *The Environmentalist*. 19, 129-136, (1999).
- Nourbakhsh M, Sag~ Y, zer DO⁻, Aksu Z, Kutsal T, ag~lar AC. A comparative Study of various biosorbents for removal of chromium (VI) ions from industrial waste water. *Process Biochem.*, 29,1–5, (1994).
- 32. Carrilho ENVM, Gilbert TR. Assessing metal sorption on the marine alga Pilayella littoralis, *J. Environ. Monitor.* 2, 410–415, (2000).

International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)

C. N.Deepa and S.Suresha*

Page 24.





Corresponding Author: S.Suresha Department of Environmental Science,

Yuvaraja's College, University of Mysore, Mysore-05, Karnataka, India *Corresponding Author: <u>sureshakumar12@yahoo.com</u>



International Journal of Pharmacy and Biological Sciences (e-ISSN: 2230-7605)